

BigShot™ ABY True Bypass Switcher

True bypass ABY amp selector with tuner out, On-board transformer to eliminate ground buzz, 180° polarity reverse to phase-match amps, Compact and rugged for pedalboards, Plug and play easy to use



Designed for the purist, the Radial BigShot ABY is an ultra compact, 100% passive foot switch that provides true bypass ABY amp switching capabilities with A or B toggle and A + B combine functionality. This assures the guitar signal is routed directly to the amp without any buffering, loading or tone altering circuits.

To add versatility, the BigShot ABY has a built-in transformer that can be engaged to eliminate troublesome ground loops. Once on, you can also ensure your two amps are properly in phase using the 180° polarity reverse switch.


The compact yet ultra rugged design makes the BigShot ABY ideal for pedalboard designs where space is always at a premium. Furthermore, because it does not require powering to make it work, it eliminates the need for batteries and space hungry power supplies.

BigShot™ ABY with two amps and tuner:

This setup lets you select between two amplifiers with the right footswitch and combine both amps with the left footswitch. The always-on tuner output adds the convenience of 'anytime' tuning adjustments.

In this setup:

- Instrument goes into the ABY's INPUT jack
- Amp-A connects to the the OUTPUT-A jack, Amp-B to OUTPUT-B
- Tuner is connected to the ABY's dedicated tuner-out jack

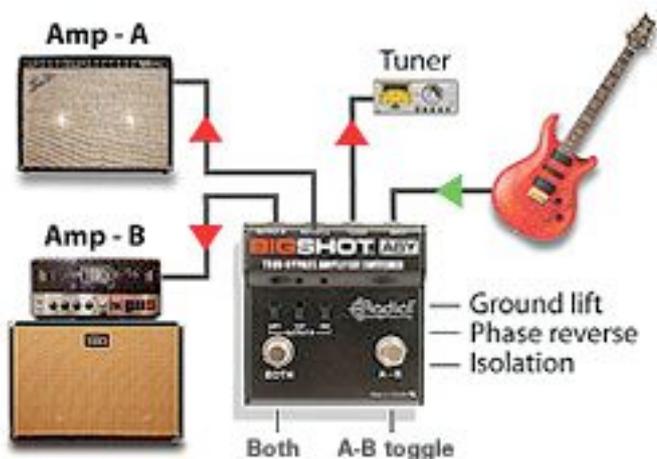


BigShot™ ABY amp / tuner mute:

With this setup you can mute your amp for a quick tuneup with a single footpress of the right (A-B toggle) footswitch. In this scenario, the tuner is completely out of the circuit when not needed for the purest guitar tone.

In this setup:

- Instrument goes into the ABY's INPUT jack
- Amp connects to the ABY's OUTPUT-A jack
- Tuner is connected to the ABY's OUTPUT-B jack

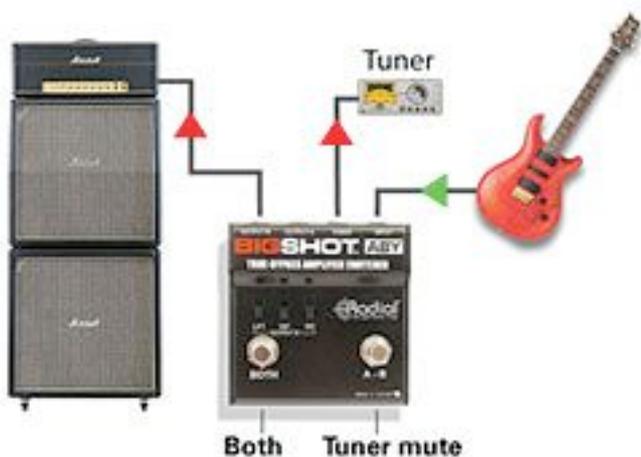

BigShot™ ABY as an instrument selector:

To illustrate the versatility of the ABY, you can use it 'backwards' as an instrument selector! Switch between the two instruments with the right footswitch.

In this setup:

- Your amp gets its signal from the ABY's INPUT jack
- One guitar connects to the OUTPUT-A jack, the other to OUTPUT-B
- Tuner is connected to the ABY's dedicated tuner-out jack

